



## FEATURES AND BENEFIT



- Wireless Remote control
- Low-battery warning indicator
- Low power consumption
- Locate, Test and silence function
- LED operation indicator
- Transmit rang about 100 meters
- Surface mounted
- Easy to install and operate

## PRODUCT SPECIFICATIONS

<b>Model Number</b>	VST-RM588
<b>Operation Temperature</b>	-10°C—50°C
<b>Power Source</b>	2*1.5V AA Batteries
<b>Standby Current</b>	10uA max
<b>Current Consumption</b>	35mA max
<b>Working Frequency</b>	433/868MHZ
<b>Ambient Humidity</b>	10%-95%
<b>Low-voltage Indication</b>	≤2.1V
<b>Unit Dimension:</b>	88.0mm×88.0mm×27.5mm

## GENERAL DESCRIPTION

The VST-RM588 is a wall mounted triple switch designed for working with VST wireless Smoke /Heat/ Carbon Monoxide Alarms and other accessories. It allows you to realize the functions below without having to access the alarms on the ceiling.

- Test — Operate weekly to test the Smoke/Heat/CO Alarms.
- Locate — Identify the source of Alarm.

This is particularly useful when a number of alarms are sounding as the unit sensing the fire or CO can be identified audible by press and release the Locate

**Xiamen Vs-Top Electronics Co., Ltd.**

2nd floor, No-107 Xiaguang Road, Haicang Xinyang Industrial District, Xiamen, China 361026

Tel: +86-592-6017700

Fax: +86-592-6017711

E-mail: [sales@orientalert.com](mailto:sales@orientalert.com)

Website: [www.orientalert.com](http://www.orientalert.com)




button.

Silence — To silence alarms.


With nuisance alarms, pressing the Silence button will silence all the series alarms in the system. This should only be pressed after the Locate button has been used to identify the alarm that has triggered the system and it is clear that no fire is present.

## WIRELESS INTERCONNECTION FUNCTION

The 1~4 numeric is for ID coding, total 16 coding (refer to **TABLE1**). ID 0 (coding 0000) is a public ID, and it can communicate with other all other 15 IDs. However, except ID0, the devices can communicate with each other only in same ID coding.



The interconnection diagram below is for your reference.

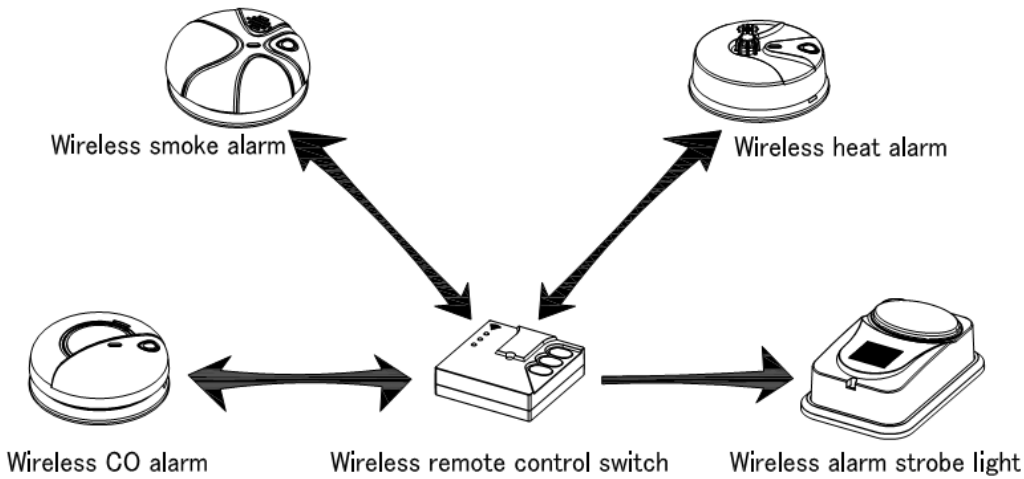

1~4	ID	1~4	ID
0000	0	1000	8
0001	1	1001	9
0010	2	1010	10
0011	3	1011	11
0100	4	1100	12
0101	5	1101	13
0110	6	1110	14
0111	7	1111	15