


The KU3 is a compact, mobile CO<sub>2</sub>-filling unit. It is especially appropriate for service offices and service vehicles to fill CO<sub>2</sub> directly on-site.

The unit is equipped with:

- » 2 pcs. CO<sub>2</sub>-hose (160 bar)
- » Pressure gauge (160 bar)
- » Electric cable 230 V

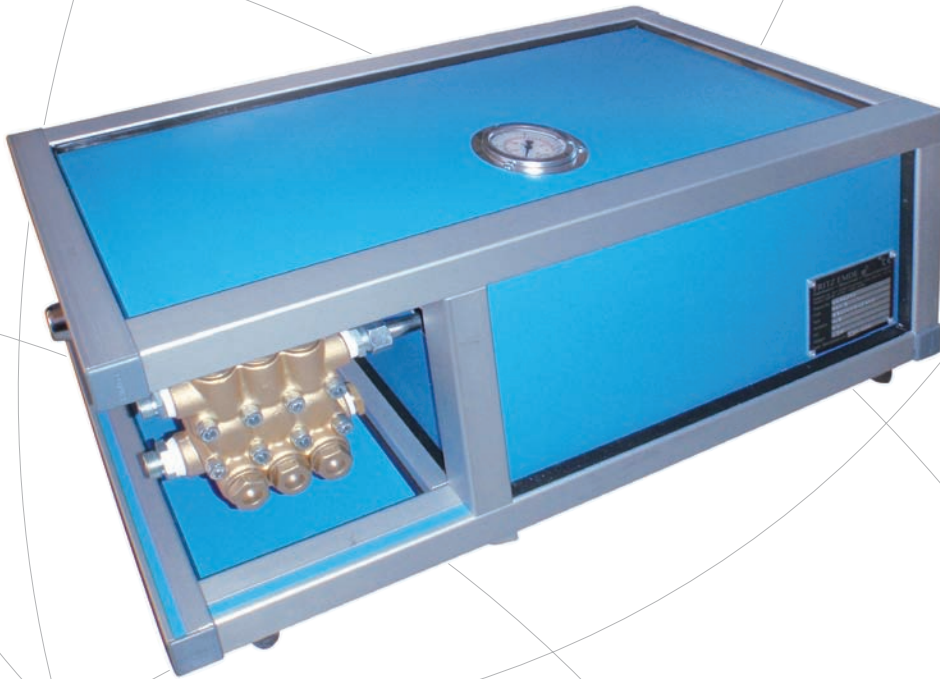

## TECHNICAL DATA

### KU3 (No. 251 000)

Construction:	steel construction with sheet casing
Pump:	3-piston-pump
Motor:	230 V, 16 A
Weight:	approx. 34 kg
Capacity:	max. 3.5 kg/min
Dimensions (l x w x h):	approx. 550 x 400 x 340 mm
Colour:	hammer finish painted blue or silvergrey



## TECHNICAL DATA

### KUD3 (air compressed) (No. 203 000)

Construction:	aluminium
Motor:	Compressed-air driven 8 – 10 bar
Weight:	approx. 25 kg
Capacity:	max. 3.5 kg/min
Dimensions (l x w x h):	approx. 550 x 400 x 340 mm
Colour:	hammer finish painted blue or silvergrey

## TECHNICAL DATA

### KUS3 (No. 231 000)

Construction:	aluminium
Pump:	3-piston-pump
Motor:	380 V, 12 A
Weight:	approx. 36 kg
Capacity:	max. 3.5 kg/min
Dimensions (l x w x h):	approx. 550 x 400 x 340 mm
Colour:	hammer finish painted blue or silvergrey