
Truckman's Choice



Bullet Raker Carbide Tipped Ventilation Chain: Protects the specially designed carbide cutter with a raker shaped like a bullet. Combined with a narrow gullet,

this design increases durability and safety over traditional wide gullet chains. (Single and Dual Raker Carbide Chains available.)

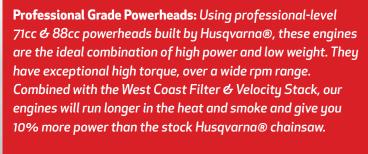

One-Step Starting: Simple & Reliable starting procedure for today's firefighters.

Full-Wrap Handle: Allows the operator to cut safer in more positions. It also functions as a chain catcher.

Scrench Tool: Multi-Tool mounted right on the saw to remove the spark plug and adjust the chain.

All saws include a 2-year warranty.

Depth Guard (Optional)

Fully extended, the Guard completely covers the bar & chain. Once you are in position you can adjust your depth to prevent from cutting any deeper than necessary. This quard removes quickly without any tools.

Division of



BEATS EXPERIENCE

Call us at 800-504-2044 or email info@truckmanschoice.com for more information.

www.truckmanschoice.com





Bullet Raker

- The Bullet Raker Carbide -Tipped Chain protects the specially designed carbide cutter with a raker shaped like a bullet. Combined with a narrow gullet, this design increases durability and safety over traditional wide gullet chains.
- Great durability on multi layer roof decks and lightweight sheet metals.
- Ultra-Low Kickback (Certified Test Results, ISO9518 by SMP)
- Economical to repair.

Roof Ventilation: A Demolition Rating: A Wood Rating: C-

Dual Raker

- The Dual Raker Carbide -Tipped Chain combines two raker gauges and a solid carbide cutter to improve impact resistance over single raker carbide-tipped chains.
- Good chain for cutting wood and other lightweight building materials.
- · Good durability on multi-layer roof decks and lightweight sheet metals.

Roof Ventilation: B **Demolition Rating: B** Wood Rating: B





Single Raker

- The Single Raker Carbide -Tipped Chain is our fastest cutting carbide-tipped chain.
- Best chain for cutting wood and other lightweight building materials.
- Good durability on single layer roof decks.
- Economical to repair, this chain can be sharpened up to 3 more times than standard carbide chains.

Roof Ventilation: C Demolition Rating: B Wood Rating: A


Our Story

As a former Cutters Edge® East Coast service center with over 20 years of experience, we know what it takes to provide you with the equipment and service you have come to expect. We will uphold that standard.

Truckman's Choice™ Fire-Rescue Chainsaws are built with the same quality and precision that you have come to expect and rely on.

Compare our saws to the ones you already have in service. We know you'll be satisfied. If you are a new customer, then get ready to own the saw that started it all and still today has more modifications than any other ventilation saw on the market.

Cutters Edge is a registered trademark of Edge Industries. Truckman's Choice and Eastern Fire Equipment Services are not associated with either Cutters Edge or Edge Industries.



Truckman's Choice™ Fire Rescue Saw Specifications - Model 7100TC/9000TC

ENGINE

TYPE: Single-cylinder 2-cycle **DISPLACEMENT:** 7100TC: 4.3 cu.in. (70.7cc)

9000TC: 5.36 cu.in. (87.9 cc)

CYLINDER MATERIAL: Chrome Bore MAX ENGINE SPEED: 13,500 RPM No load HORSEPOWER: 7100TC: 6.24hp/4.59kW

9000TC: 7.15 hp/5.26 kW

IGNITION SYSTEM

TYPE: Max Logic, One piece modular

Electronic

SPARK PLUG: NGKBPMR7A GAP: 0.020 in. 10.5mm)

STARTING SYSTEM

TYPE: "One Step" with Compression release

valve and large D- Handle.

SPARK PLUG: NGKBPMR7A GAP: 0.020 in. 10.5mm)

AIR FILTRATION

TYPE: 4-stage external air filter/ Prewrap "West Coast Filter" - Velocity Stack SYSTEM:

FUEL & 2 CYCLE OIL MIX

TYPE: Gasoline

GASOLINE OCTANE

RATING: Use 87 octane or higher

Petroleum based: 2-cycle oil use: 50:1 **FUEL MIX RATIO:**

Synthetic: Follow manufacturer's

quidelines

FUEL TANK CAPACITY: 26.8 fl.oz. (0.77 liters)

DRIVE SYSTEM

TYPE: Centrifugal Clutch

STYLE: Radially ported, free floating sprocket

No load chain speed 121.6 FPS CHAIN SPEED:

(feet per second)

37.06 m/sec (meters per second)

GUIDE BAR

TYPE: Sprocket Nose

High Strength Solid Steel Alloy MATERIAL: 12" (30.48cm) | 16" (40.64cm) **CUTTING LENGTHS:**

20" (50.80cm) | 24" (60.96cm)

SIZE: .404 Pitch .063 Gauge **CARBIDE CHAIN**

TYPE: **Bullet Raker**

SIZE: .404 Pitch .063 Gauge

OPTIONAL CHAINS: DUAL RAKER Carbide-Tipped

SINGLE RAKER Carbide-Tipped

CHAIN LUBRICATION SYSTEM

TYPE: Fully automatic, adjustable LUBRICANT: Use High Quality Bar & Chain Oil

w/ High Tack properties

OIL TANK CAPACITY: 14.24fl.oz. (0.42liters)

HANDLES

TYPE: Full Wrap

GUARD PLATE

TYPE: Aluminum

DEPTH GUARD (Optional)

TYPE: Tool-Less, Completely covers the bar & chain

MATERIAL: Aluminum

6 inches- 16" Bar | 8 inches- 20" Bar **DEPTH OF CUT:**

10 inches- 24" Bar (9000TC only)

WEIGHTS

7100TC POWERHEAD 15.65 lbs (7.10kg) (No Oil & Gas)

ONLY: Add 1.85 lbs (.84 kg) for Oil & Gas

> 12" 16" D16 D20 18.15 18.7 19.40 20.90 21.95 (pounds)

16.65 lbs (7.6 kg) (No Oil & Gas) 9000TC POWERHEAD

ONLY: Add 1.85 lbs (.8 kg) for Oil & Gas

> 12" 16" 20" 24" D16 D20 D24 19.9 | 20.55 | 21.25 | 21.84 | 22.75 | 23.85 | 24.80 | (pounds)

STANDARD "Scrench" Tool, Tool Kit, **ACCESSORIES** Manual, Bar & Chain Oil,

INCLUDED: 2-cycle Oil