

MAST PUMPS All-purpose pump NP 8 B

high-performance • robust • reliable

Technical data:

Self-priming centrifugal pump

seawater-resistant aluminum alloy pump body acc. to DIN EN 1706

Application area: raw water

Engine: 4 – stroke OHV – petrol Vanguard

Output: 4,0 KW at 3600 min⁻¹

Suction height: up to 8,4 m self-priming

Grain passage: Ø 10 mm


Connection size: G 2 ½ “ (B – Storzcoupling)

Weight: 45 kg

Dim. L x B x H: 620 x 460 x 500 mm



pump. head H m

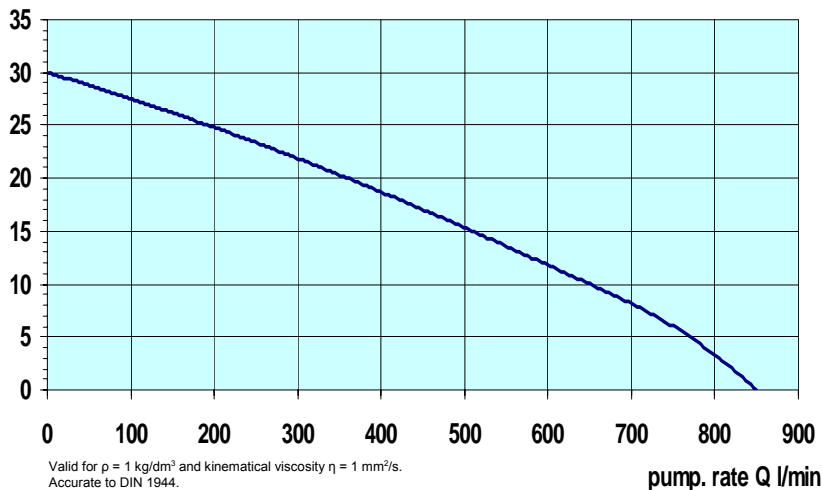

NP 8 B

l / min.	m
850	0
770	5
650	10
360	20
0	30

Pumping rate Q l/min.
acc. to DIN 1944
at a pumping head H m

MAST PUMPEN GmbH

Pump Manufacturer

Mörkestr. 1

D - 73773 Aichwald

Tel. +49 (0)711/ 93 67 04 - 0

Fax +49 (0)711/ 93 67 04 - 30

E-Mail: info@mast-pumpen.de

Internet: <http://www.mast-pumpen.de>

Subject to change. FE13 10.04

Highest quality and technical perfection.