

# MAST PUMPEN


## Submersible pump TP 15 - 1 DIN 14 425 PVR 307/12/84 IP68

high-performance • robust • reliable

### Technical data:

Submersible pump feat. MD – Electronic System  
automatic rotating direction facility, phase-failure protection, temperature protection, voltage monitoring

Application area: raw water  
Motor: 3~ 400 V AC  
Output  $P_1 / P_2$ : 5,3 / 4,5 KW  
Rated current: 9,3 A  
Grain passage: Ø 15 mm  
Connection size: G 4" (A – Storzcoupling)  
Weight: 47 kg  
Dim. Ø x H x B: 260 x 570 x 440 mm

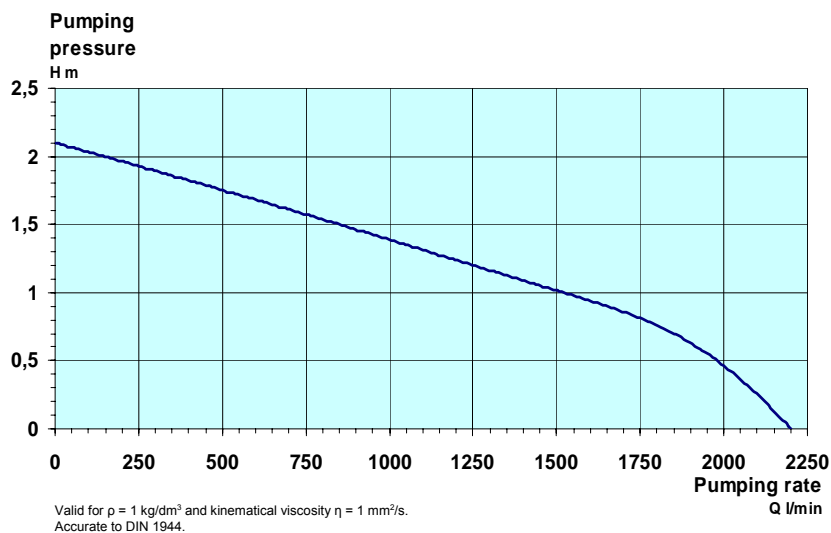

**TP 15 - 1**

l / min.	bar
2200	0
1980	0,5
1520	1,0
850	1,5
0	2,1

Pumping rate Q l/min.  
acc. to DIN 1944  
at a pumping pressure bar

### MAST PUMPEN GmbH

Pump Manufacturer  
Mörkestr. 1  
D - 73773 Aichwald  
Tel. +49 (0)711/ 93 67 04 - 0  
Fax +49 (0)711/ 93 67 04 - 30  
E-Mail: [info@mast-pumpen.de](mailto:info@mast-pumpen.de)  
Internet: <http://www.mast-pumpen.de>

Subject to change. FE09 10.04

Highest quality and technical perfection.