

# MAST PUMPEN

## Submersible pump TP 4 – 1 DIN 14 425 PVR 305/10/84 IP68

high-performance • robust • reliable

### Technical data:

#### Submersible pump

no oil chamber, maintenance-free, dry-running safe, standard flat-suction system

Application area: raw water

Motor: 1~ 230 V AC

Output  $P_1 / P_2$ : 1,8 / 1,3 KW


Rated current: 8,5 A

Grain passage:  $\varnothing$  8 mm

Connection size: G 2 1/2 " (B – Storzcoupling)

Weight: 21 kg

Dim.  $\varnothing$  x H x B: 190 x 500 x 235 mm

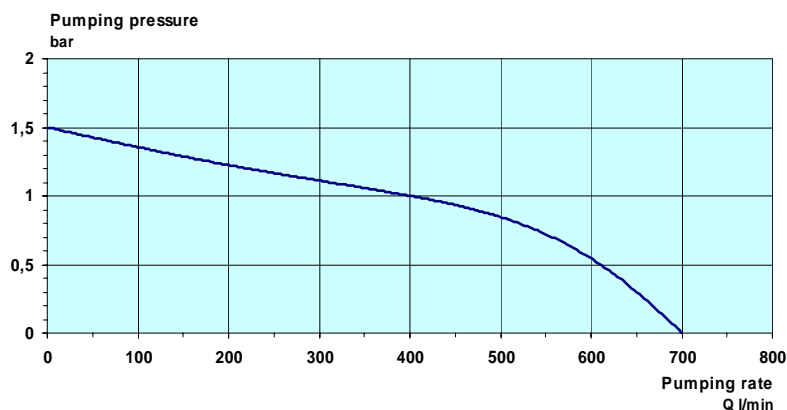

Valid for  $\rho = 1 \text{ kg/dm}^3$  and kinematical viscosity  $\eta = 1 \text{ mm}^2/\text{s}$ .  
Accurate to DIN 1944.

### TP 4 - 1

l / min.	bar
700	0
610	0,5
400	1,0
220	1,2
0	1,5

Pumping rate Q l/min.  
acc. to DIN 1944  
at a pumping pressure bar

## MAST PUMPEN GmbH

Pump Manufacturer

Mörkestr. 1

D - 73773 Aichwald

Tel. +49 (0)711/ 93 67 04 - 0

Fax +49 (0)711/ 93 67 04 - 30

E-Mail: [info@mast-pumpen.de](mailto:info@mast-pumpen.de)

Internet: <http://www.mast-pumpen.de>

Subject to change. FE07 10.04

Highest quality and technical perfection.