

MAST PUMPEN

Submersible pump T 12

high-performance • robust • reliable


Technical data:

Submersible pump feat. MD – Electronic System
automatic rotating direction facility, phase-failure protection, temperature protection, voltage monitoring

Application area: raw water
Motor: 3~ 400 V AC
Output P_1 / P_2 : 3,0 / 2,4 KW
Rated current: 5,5 A
Grain passage: Ø 15 mm
Connection size: G 2 ½ " (B – Storzcoupling)
Weight: 40 kg
Dim. Ø x H x B: 260 x 560 x 390 mm



pump. head H m

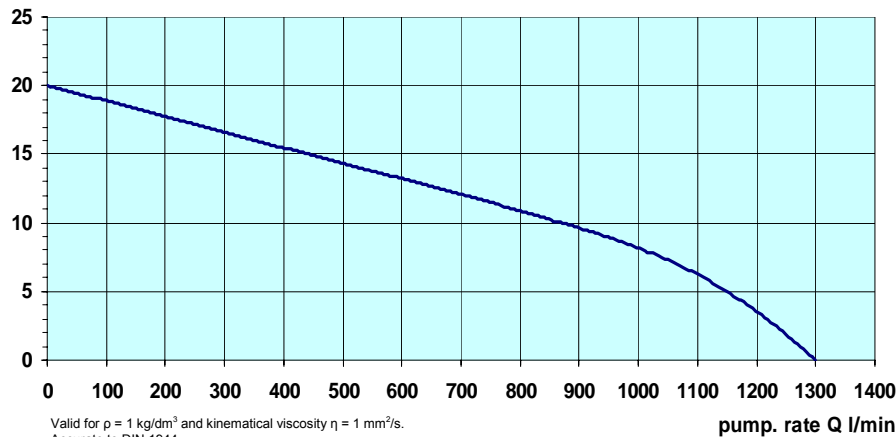

T 12

l / min.	m
1300	0
1150	5
870	10
440	15
0	20

Pumping rate Q l/min.
acc. to DIN 1944
at a pumping head H m

MAST PUMPEN GmbH

Pump Manufacturer
Mörkestr. 1
D - 73773 Aichwald
Tel. +49 (0)711/ 93 67 04 - 0
Fax +49 (0)711/ 93 67 04 - 30
E-Mail: info@mast-pumpen.de
Internet: <http://www.mast-pumpen.de>
Subject to change. FE04 10.04

Highest quality and technical perfection.