

MAST PUMPEN

Submersible pump T 20

high-performance • robust • reliable

Technical data:

Submersible pump feat. MD – Electronic System

automatic rotating direction facility, phase-failure protection, temperatur protection, voltage monitoring

Application area: raw water

Motor: 3~ 400 V AC

Output P_1 / P_2 : 5,3 / 4,5 KW

Rated current: 9,3 A

Grain passage: Ø 15 mm


Connection size: G 4" (A – Storzkupplung)

Weight: 47 kg

Dim. Ø x H x B: 260 x 570 x 440 mm



pump. head H m

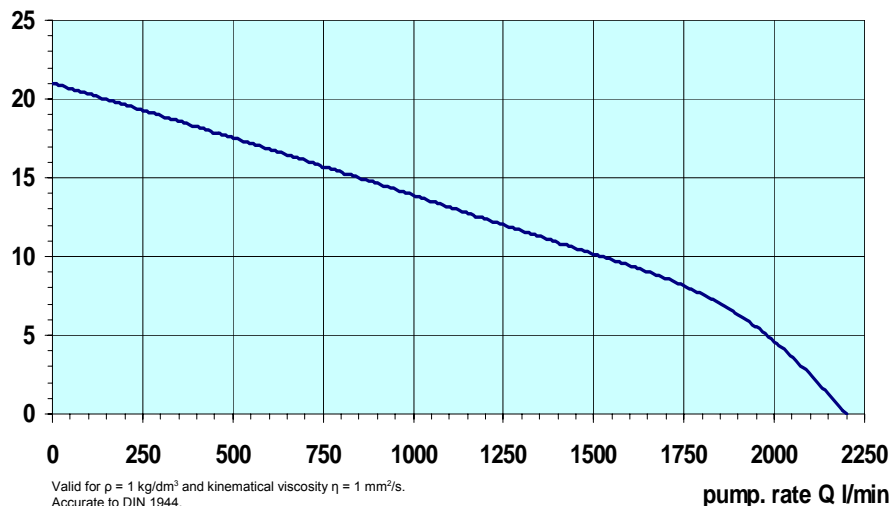

T 20

l / min.	m
2200	0
1980	5
1520	10
850	15
0	21

Pumping rate Q l/min.
acc. to DIN 1944
at a pumping head H m

MAST PUMPEN GmbH

Pump Manufacturer

Mörkestr. 1

D - 73773 Aichwald

Tel. +49 (0)711/ 93 67 04 - 0

Fax +49 (0)711/ 93 67 04 - 30

E-Mail: info@mast-pumpen.de

Internet: <http://www.mast-pumpen.de>

Subject to change. FE06 10.04

Highest quality and technical perfection.