
# technical specification



Article No: VMU20110 / 20120

# **Unifire V20 Nozzle**



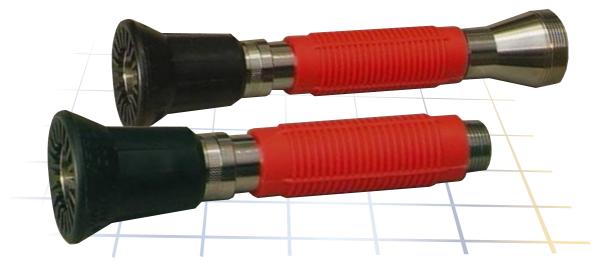

The Unifire V-nozzle is a multi-purpose fognozzle with very good performance for both fog and jet. The V-nozzles are available in both long and short versions. The V-nozzle can be combined with an attachable foam-tube for heavy and medium foam. The V-nozzles are used on a number of Unifire products. Look for the V-nozzle logotype.

#### How to operate

Twist the nozzle head to select spray-pattern -Stepless adjustable from shut-off via jet to 90° fog.

# **Applications**

Fireextinguishing with fog or jet. Proven very reliable. Designed for heavy professional use.

#### Operating pressure

2 - 12 Bar

#### Material

Chromeplated brass, red plastic cover and rubber bumper head.

# Weight & Measurements (With 2" conn.)

Length: 330 mm Nozzle Ø: 80 mm Weight: 1.7 kgs

#### Connections

1" or 2" BSP Male thread. (Short version 1" female)

The UNIFIRE V-nozzles are available in sizes 7, 10, 12, 14, 16, 18, and 20

# Maintanence / Spareparts

The nozzle is practically maintenance-free. Only sparepart is the baffle and its screw.

# **Approvals**

Nozzle approved by: Lloyd, Det Norske Veritas, Bureau Veritas, American Bureau of Shipping e.t.c.

### Capacities UNIFIRE V20 nozzle

	Jet		Fog 90°	
Pressure Bar	Flow Ipm	Range meters	Flow Ipm	Range meters
2	252	27	285	11
6	442	37	480	13
10	576	43	650	16