

# Ardenoak Fire Limited

Unit 6 Beacon Court, Pitstone Green Business Park, Quarry Rd  
 Pitstone, Leighton Buzzard, Bedfordshire, LU7 9GY. England  
 Tel: +44 (0) 1296 663 280 Fax: +44 (0) 1296 663 288  
 www.ardenoak.net sales@ardenoak.net

## METEOR EMERGENCY LIGHT



850 hot  
wire test

IP  
rating

Viewing  
distance

Guarantee


(With legend)

The METEOR is a versatile and economical weatherproof bulkhead (IP65). It has a low profile ABS housing which incorporates a 'quick fix clip in' geartray.

Maximum light output is obtained by use of computer designed 'Optically Balanced' diffuser, which ensures even light distribution. Viewing distance with the legend is 16m internally & 8m externally

### Features.

- Fire retardant housing (For use in escape routes).
- Fully automatic constant current charging system.
- High temperature nickel cadmium batteries.
- Highly efficient high frequency inverter.
- 'Quick fit' gear tray.
- Cable entries at each end and in the centre of the base.
- Mains healthy & charging LED.

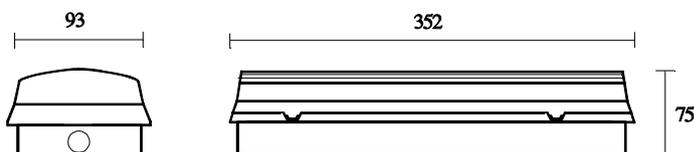

REF	DESCRIPTION
ME/ NM3F	T5 8 w 3 Hour Non-maintained
ME/ M3F	T5 8 w 3 Hour Maintained
ME/ PIC/ AD	Legend - arrow down
ME/ PIC/ AR	Legend - arrow right
ME/ PIC/ AL	Legend - arrow left

### PHOTOMETRIC DATA - 1 LUX

Mounting height	lux under fitting	transverse/ wall	transverse/ transverse	transverse/ axial	axial/ axial	axial/ wall
2.5M	2.13lux	1.6m	4.6m	4.3m	4.1m	1.4m
4M	0.83 lux	n/ a	3.6m	3.4m	3.0m	n/ a
Maintained Ballast Lumen Factor: 40% Maintained Nominal Lumen Output: 150 lumens						
Emergency Ballast Lumen Factor: 27% Emergency Nominal Lumen Output: 100 lumens						